

SERIES 509

SPADE DRILL 120 DEGREE POINT




EDP#	DIA.	WEB	OAL
509-1250	1/8	.020	1-1/2
509-1875	3/16	.028	2
509-2500	1/4	.035	2
509-3125	5/16	.040	2-1/2
509-3750	3/8	.046	2-1/2
509-5000	1/2	.060	2-1/2

TOLERANCE
SHANK DIAMETER
+ .000 / - .0005

USED FOR SHALLOW HOLE DRILLING AND
SPOT DRILLING IN HARD TO MACHINE
MATERIALS

NEW SERVICE COMING SOON!

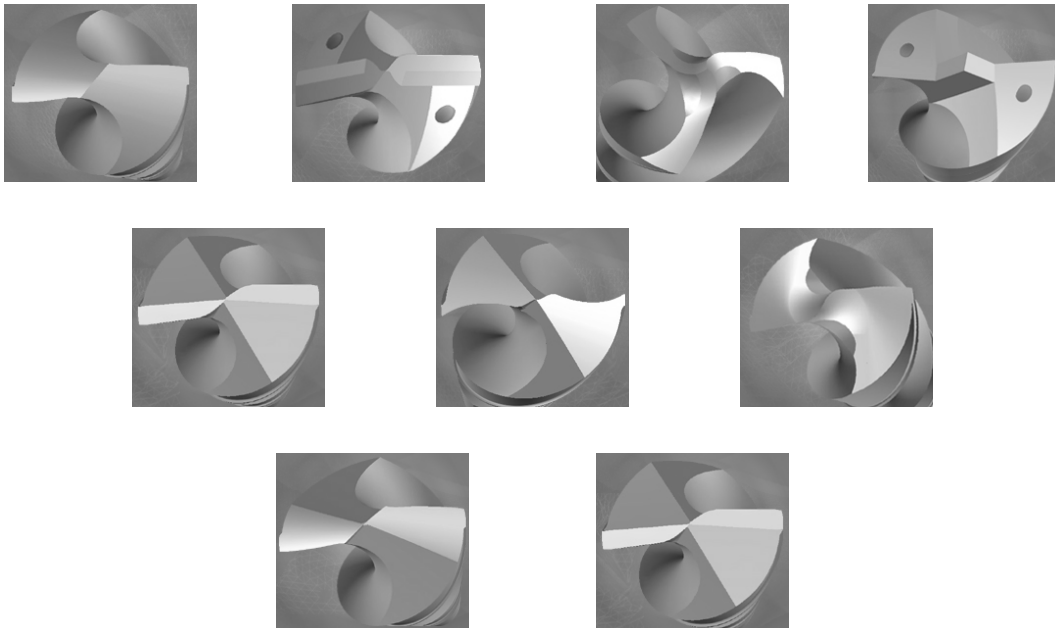

SOLID CARBIDE HIGH PERFORMANCE DRILL POINT RECONDITIONING

TOLL FREE (800)-379-1433